


## AF376AC Wall Mounted Electronic Faucet

## Spec. & Features



Faucet with Single Line Water Supply

- ◆ Infrared Sensor : Automatic Operation
- ◆ Waterproof, high quality and safety.
- ◆ Chrome Plated Cast Brass
- ◆ Liner Adapter : Input AC110V~AC220V 50/60 Hz. Output DC 6V
- ◆ Power Consumption : 0.3W (Idle), 5W (In use)
- ◆ Infrared Sensor Range : Adjustable 5cm~ 15cm (auto adjusted)
- ◆ Shut-off Delay Time : 1sec
- ◆ Time out Setting : 60sec
- ◆ 0.5GPM or1.0GPM Laminar Flow Spray Head
- ◆ Operating Water Pressure : 10 to 100 PSI
- ◆ Water Supply Connection : PF 1/2
- ◆ Mounted on a Single-hole ,wall mounting (Φ35)
- ◆ Outline Dimension : Φ30\* 179mm
- ◆ Applicable Water Temperature : 39°F~150°F (4°C ~ 65°C)
- ◆ Warranty : 2 years
- ◆ Product Compliance:ASME A112.18.1/CSA B125.1, NSF61/NSF372

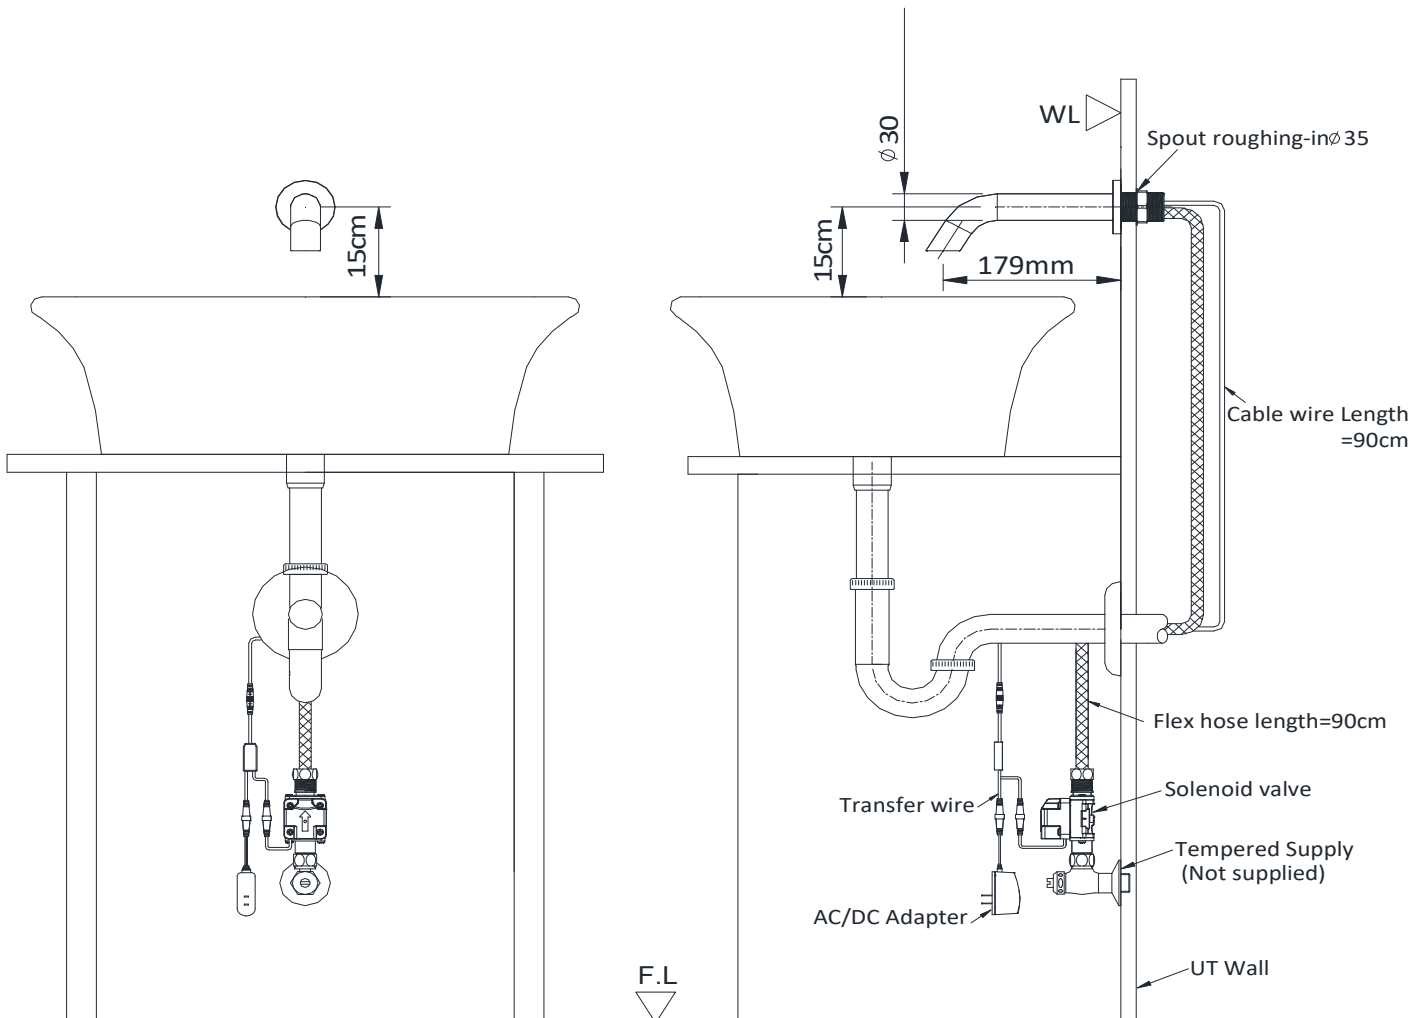

## AF376DC Wall Mounted Electronic Faucet

## Spec. & Features



- ◆ Infrared Sensor : Automatic Operation
- ◆ Waterproof, high quality and safety.
- ◆ Chrome Plated Cast Brass
- ◆ Battery Power : Size AA Alkaline Battery \* 4pcs
- ◆ Battery Life : 2 Years ( Based on 3000 cycles per month)
- ◆ Infrared Sensor Range : Adjustable 5cm~ 15cm (auto adjusted)
- ◆ Shut-off Delay Time : 1sec
- ◆ Time out Setting : 60sec
- ◆ 0.5GPM or 1.0GPM Laminar Flow Spray Head
- ◆ Operating Water Pressure : 10 to 100 PSI
- ◆ Water Supply Connection : PF 1/2
- ◆ Mounted on a Single-hole ,wall mounting (Φ35)
- ◆ Outline Dimension : Φ30\* 179mm
- ◆ Applicable Water Temperature : 39°F~150°F (4°C ~ 65°C)
- ◆ Warranty : 2 years
- ◆ Product Compliance:ASME A112.18.1/CSA B125.1, NSF61/NSF372

Faucet with Single Line Water Supply

