

CF107 Tank Type Closet Flusher



◆ Designed without using any electronic parts inside the tank.
It also means less problems and a longer life for every Smart Toilet.

Spec. & Features

Can be used both for commercial and residential restrooms.

♦ Battery Power:

Sensor Unit: DC6V (AAX4)

Solenoid Valve Assembly: DC6V (AAX4)

◆ Infrared Sensor Range : 10cm◆ Low Battery Indicator Light

◆ Remote Type: RF Wireless Remote Control (315MHz)

◆ Detection Time: 0.5 Sec

◆ Flush Time : Adjustable (1.2.3.4.5.6.7.8Sec)

♦ Flush Delaying Time: 2 sec


◆ Flush Volume: 6 ~ 9 liter (adjustable)


◆ Operating Water Pressure: 10 to 100 PSI


◆ Easy to Install and Maintain

♦ Mechanical Life: Over 500,000 flushes

◆ Warranty : 1 year





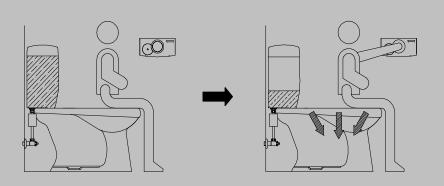

. When the user's hand approach the detection zone, the sensor sends a signal to activate the solenoid valve which lifts the flapper and flushes the toilet.